

Model: **C-KSC401-KSV101**

**Circular Fixed Shower Head with Rough-in Valve**

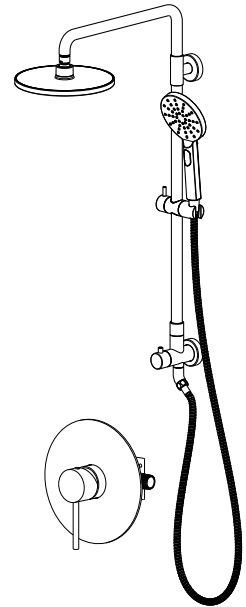
**SPEC SHEET**

**Valve Features**





- Heavy brass construction for durability and reliability.
- Back-to-Back installation capabilities.
- All parts replaceable from the front of the valve.
- Pressure balancing ceramic cartridge ensures anti-scald operation and life long trouble-free service.
- Single lever handle operation allows both volume and temperature control.
- Max-temperature limit stop for added safety.
- Dual inlet and outlet ports – 1/2" CxC soldering & 1/2" NPT thread.
- Adjustable installation depth from 1-3/4" (45mm) to 2-15/16" (75mm).
- Mud guard is provided to help protect valve from dust and debris during installation.
- Limited lifetime warranty

**Shower column Features**

- Solid brass construction for durability and reliability.
- Sliding hand shower holder adjusts the height and angle of the hand shower.
- 15 inch shower arm.
- 9 inch shower head.
- Single lever handle operation allows both volume and temperature control.
- Retro fits into existing shower arm - no need to modify in-wall plumbing.
- Integrated hose supply. No need for separate wall elbow.
- Angle adapter to prevent hose interfering with shower valve
- Limited lifetime warranty.



**Available Finishes**

| Finish  | Code | Description    |
|---|------|----------------|
|   | CH   | Chrome         |
|  | BN   | Brushed Nickel |
|  | MB   | Matt Black     |
|  | BG   | Brushed Gold   |

