


SPEC SHEET

Features

- Handcrafted from fine fireclay
- Non-porous glossy surface
- Fired at above 2200 °F for 24 hours
- Resists chips, stains, cracks and scratches
- Apron-front visible or concealed apron
- 3-3/4" Drain opening
- Bottom Grid and drain basket included
- Recommended minimum cabinet size: 33"
- UPC/cUPC compliant
- · Limited lifetime warranty

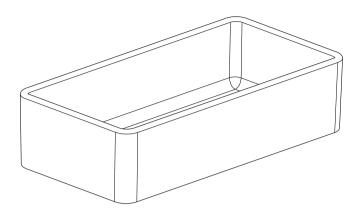

Fired at above 2200 °F



Prevents Condensation



Heat Resistant



Stain Resistant



Fade Resistant



